



PROPERTY OF HITEC PRODUCTS, INC.

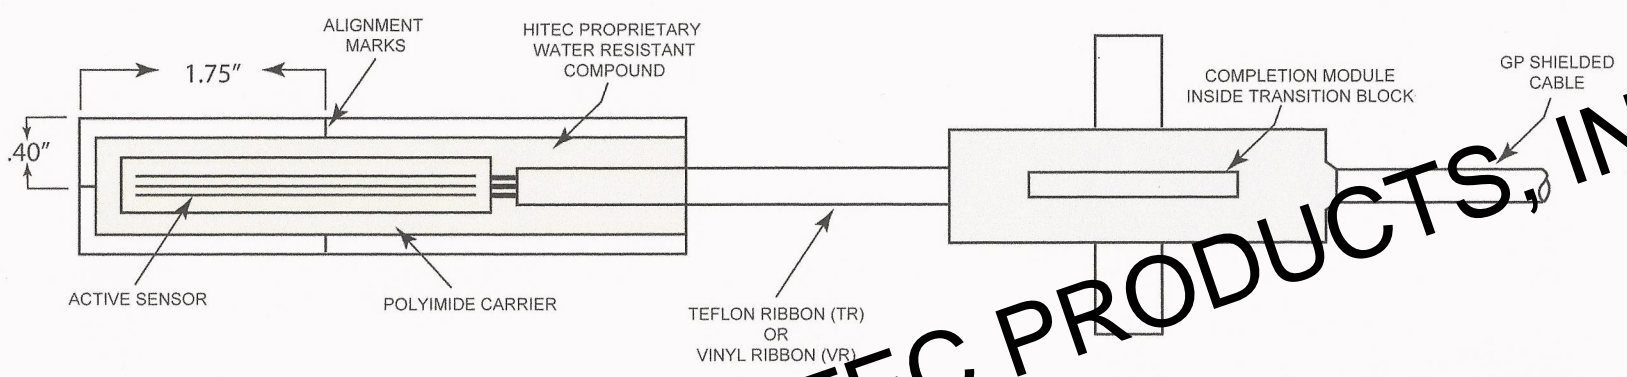

WIRING DIAGRAM

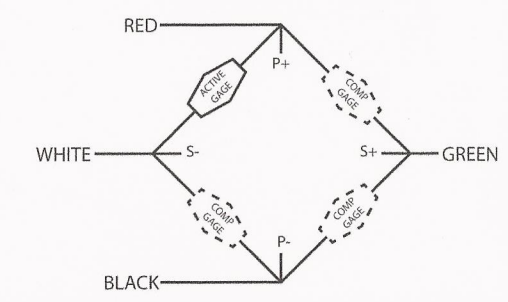

| SPECIFICATIONS | | | | HITEC PRODUCTS, INC. | |
|--------------------------|---------------------------|------------------------------------|-------------------------------|---|----------------------|
| SENSOR TYPE | EA-06-20CBW-120 or equiv. | TEMP. COMPENSATION | 6ppm/°F | GAGE DESCRIPTION: HBP-12-2000-C-GP-FB-TR | |
| SENSOR ALLOY | | STRAIN DESCRIPTION | Static | DRAWING NO.: 80-849 | |
| SENSOR LENGTH | 2.0" | MAX. OPERATING TEMP. | 180°F | | |
| GAGE FACTOR(nominal) | 2.0 | INTERMEDIATE WIRE | Teflon Ribbon or Vinyl Ribbon | APPROVED BY: <i>BP</i> | DATE: <i>4.14.17</i> |
| GAGE RESISTANCE(nominal) | 120 Ohms | TRANSITION DIMENSIONS | .50" x .50" x 2.5" | CUSTOM DRAWING: | |
| CABLE TYPE | GP Shielded Cable | SHIM MATERIAL | Polyimide (bondable) | | |
| CABLE LENGTH | Customer Specified | SHIM DIMENSION | .80" X 3.5" | | |
| ENCAPSULATION | Water Resistant | NOTES: 3 Element Completion Module | | | |