




PROPERTY OF HITEC PRODUCTS, INC.

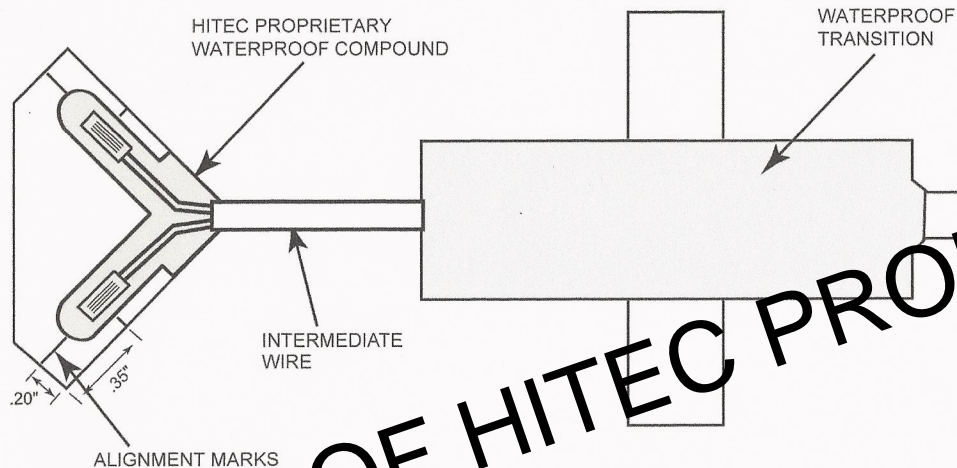

WIRING DIAGRAM x 2

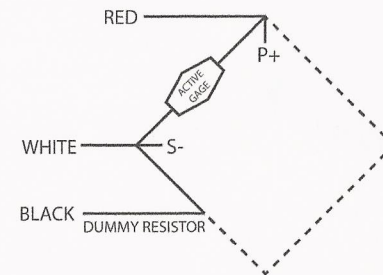

SPECIFICATIONS				HITEC PRODUCTS, INC.	
SENSOR TYPE	(2) EA-06-125BZ-350	TEMP. COMPENSATION	6ppm/°F (1018 steel)	<b>GAGE DESCRIPTION: HBWC-35-125-6-GP-TR(SS)-QB</b>	
SENSOR ALLOY		STRAIN DESCRIPTION	Static/Chevron	<b>DRAWING NO.: 80-846</b>	
SENSOR LENGTH	0.125"	MAX. OPERATING TEMP.	180°F		
GAGE FACTOR(nominal)	2.0	INTERMEDIATE WIRE	Teflon Ribbon or St. St. Hypo Tube (customer specified)	<b>APPROVED BY:</b> <i>BP</i>	<b>DATE:</b> <i>4/13/17</i>
GAGE RESISTANCE(nominal)	350 Ohms	TRANSITION DIMENSIONS	.50" x .50" x 2.50"	<b>CUSTOM DRAWING:</b>	
CABLE TYPE	6-Cond Shielded Vinyl Cable	SHIM MATERIAL	Standard		
CABLE LENGTH	Customer Specified	SHIM DIMENSION	1.06" X 1.06"		
ENCAPSULATION	100% Immersion tested in clear water	NOTES:			